



MicroComm DXL


TBE-310 Talkback Expander

Description

The TBE-310 Talkback Expander offers a flexible solution for driving high power loudspeakers with talkback capability and audio level alarm. Each unit has 8 amplifier output channels that can be used to drive paging loudspeakers with each channel delivering an output power of up to 5.0 watts into a constant voltage loudspeaker circuit. Adjacent channels can be bridged to form groups that can provide higher power output. In talkback mode the loudspeaker functions as both a speaker and a microphone. The 1U 19" rackmount enclosure connects to the DXL system via USB.




Features

- 8 amplified outputs that can optionally drive either 25 Vrms loudspeaker circuits or 70 Vrms loudspeaker circuits
- 5.0 watts output per channel
- adjacent channels can be bridged to obtain higher power
- from 2 to 8 channels can be bridged to form a group
- up to 4 groups can be formed
- loudspeakers can operate in talkback mode
- USB connection to exchange
- 2 type A and 1 type B USB ports
- 1U 19" rackmount or wallmount
- Built in Audio Level Alarm (ALA) feature

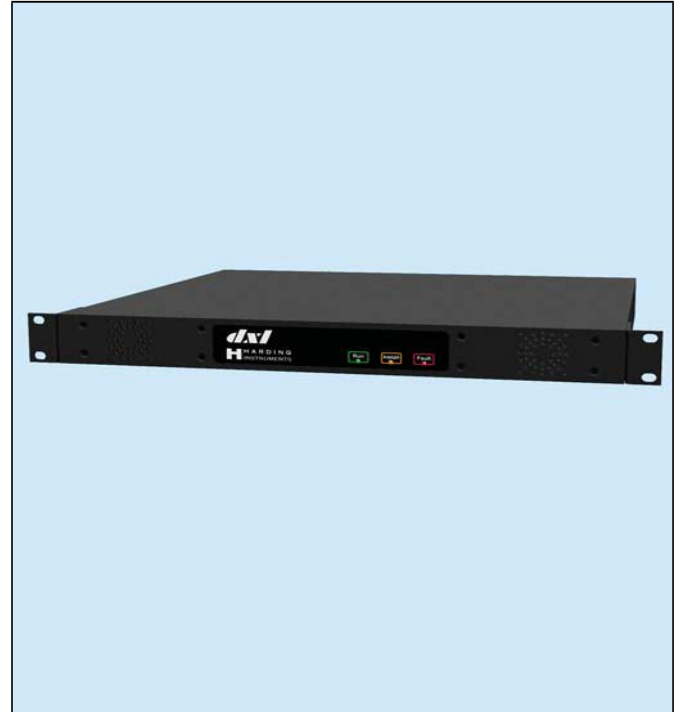

Specifications

Physical Form Factor	1 U rack mount 1.75" x 19" x 16.13" (4.45 x 48.3 x 41.0 mm)
Environmental	
Operating Temperature	32 to 122 °F (0 to 50 °C)
Storage Temperature	-40 to 158 °F (-40 to 70 °C)
Humidity	0 to 95 % non-condensing
Power Requirements	95-135 Vac, 47-63 Hz, 1.25 A or 180-265 Vac, 47-63 Hz, 0.75 A
Field Connections	
Input Power	AC linecord
Audio Outputs	Receptacle for Screw Terminal Blocks (CON0141) or Field Interface Cable (CBL-150-A)
USB	2 type A and 1 type B
Paging Outputs	
Maximum power	5.0 W max @ 25 Vrms per channel or 5.0 W max @ 70 Vrms per channel
Standards	FCC Part 15, UL, CSA

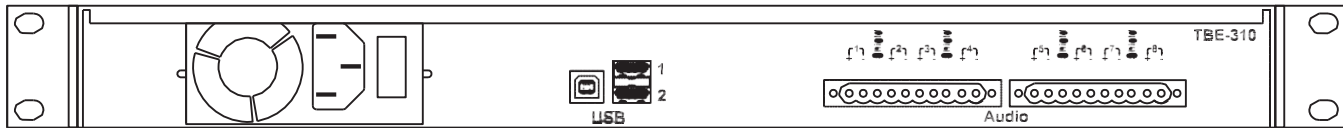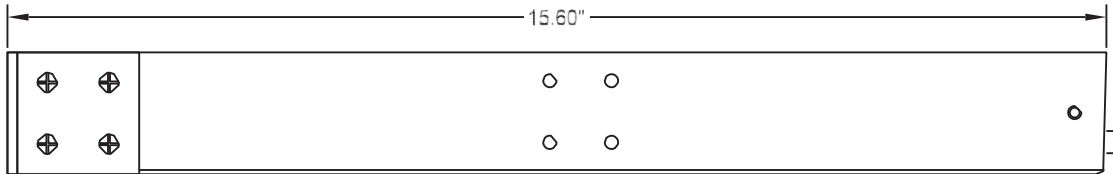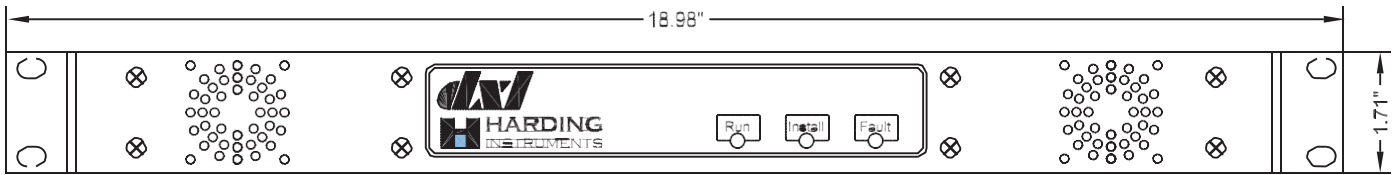

Ordering Information

Part Number TBE-310-A
 A loudspeaker circuit voltage
 1 25 Vrms
 2 70 Vrms

Accessories

Field Interface Cable CBL-150-A
 Screw Terminal Blocks CON0141 (2 per TBE)



9564 Yellowhead Trail NW Tel 780.462.7100
 Edmonton, AB T5G 0W4 Fax 780.450.8396
 sales@harding.ca www.harding.ca



Represented by: