



Description

The SPM-421 Station Paging Microphone is used in MicroComm DXI and DXL intercom systems to provide a stand alone microphone that can be used for paging. The handheld push-to-talk switch allows the operator to establish and maintain a page call to a specified page zone. The microphone is made of durable black plastic and is designed to be held comfortably in a user's hand.

Features


- high quality handheld electret microphone with push-to-talk switch
- durable microphone cord that can extend up to 6 feet
- mounts with standard 2-gang electrical box
- field connections consist of a single pair of wires
- compatible with DXL/DXI 400 series station ports



Specifications

Physical	4.5" H x 4.5" W x 1.50" D (114 x 114 x 45 mm)
Faceplate	
Heavy-duty	11 ga brushed stainless steel
Environmental	
Operating Temperature	32 to 122 °F (0 to 50 °C)
Storage Temperature	-40 to 158 °F (-40 to 70 °C)
Humidity	0 to 95 % non-condensing
Field Connections	4 pin MTA100 connector
Cabling	22 ga shielded twisted pair 2500 ft (750 m) maximum length

Mechanical

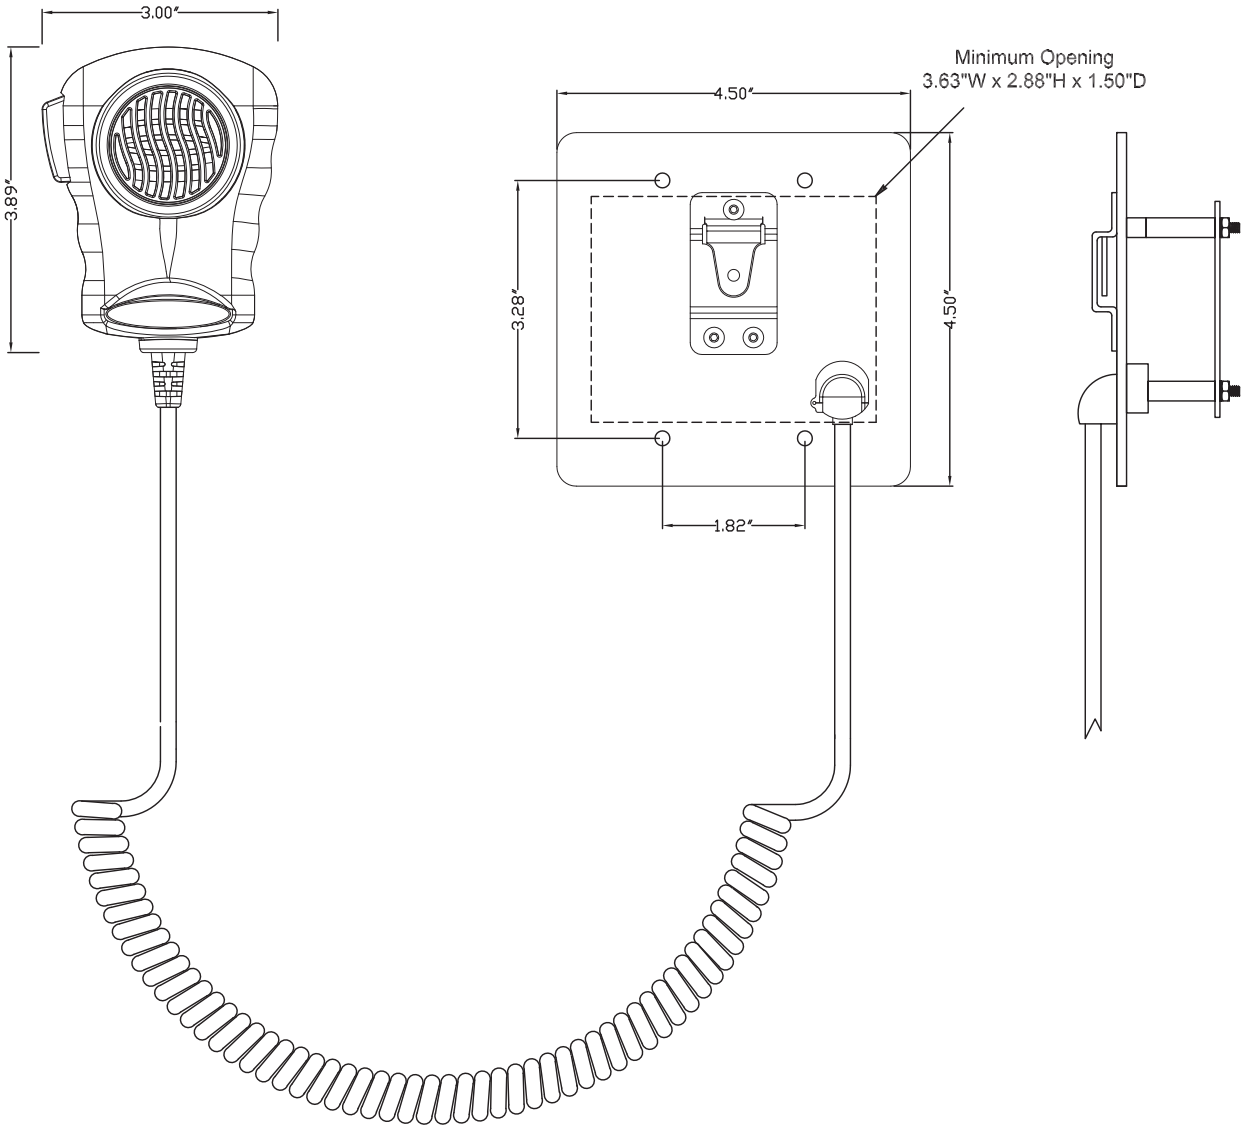

Ordering Information

SPM-421-A

A microphone cord

1 standard coiled cable - 6 ft

Document # DS-SPM-421-1.1 • Copyright © 2015 Harding Instrument Co. Ltd. • All Specifications subject to change without notice • Printed in Canada



9564 Yellowhead Trail NW Tel 780.462.7100
Edmonton, AB T5G 0W4 Fax 780.450.8396
sales@harding.ca www.harding.ca



Represented by: