

Axis^{AX}

Firefighter Phone System2 Firefighter Phone Assemblies

The AV-TEL2-MCCS and AV-TEL2-MCCS/P are assemblies that include a firefighter phone, phone enclosure and interface module.

The difference between the AV-TEL2-MCCS and AV-TEL2-MCCS/P is that the AV-TEL2-MCCS/P includes a push-to-talk firefighter phone. Both assemblies interface the Firefighter Phone System2 command center telephone with the Advanced AV-TEL2-RISE riser module.

Both the Advanced CCM-01-ID2 (3x3 command center) and CCM-02-ID2 (3x5 command center) inner doors can support an AV-TEL2-MCCS[P] assembly, mounted in the bottom left side double aperture.



Features

- Compatible with Axis AX Series Command Centers
- Class B Supervised Interface Wiring
- Up to Two (2) AV-TEL2-MCCS[P] per Riser Module
- Standard or Push-to-Talk integral phone



Ratings

- All Circuits Power Limited
- Terminals support 12-22 AWG Wire

Listings and Approvals

- ETL ANSI/UL 864 Listed: 101564744NYM-001
- NYC FD COA #6105A2

Wiring Diagram

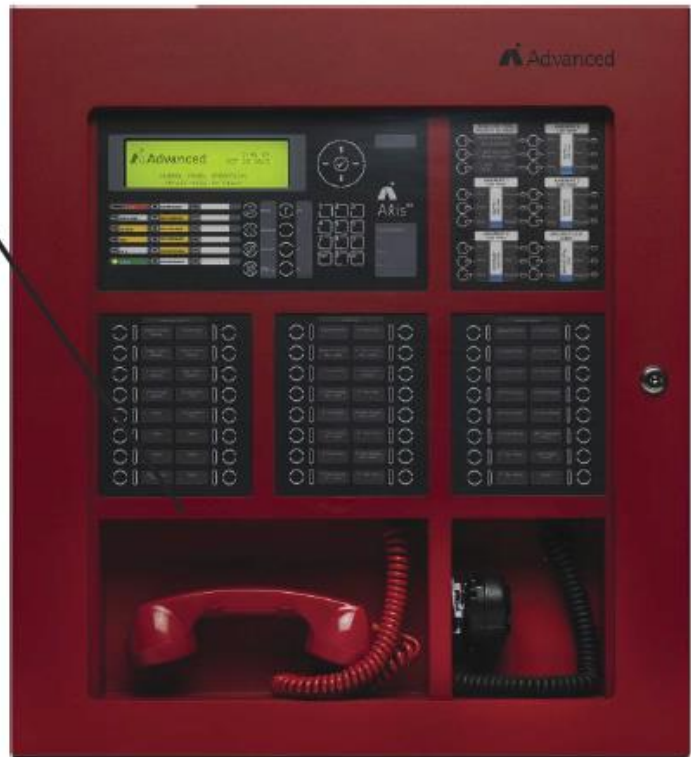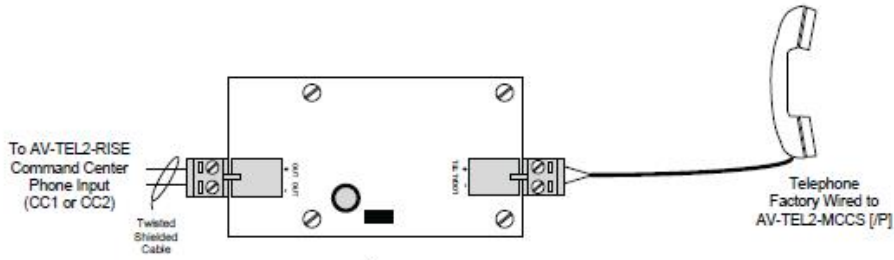

Order Codes and Options

AV-TEL2-MCCS	Command Center Firefighter Phone Assembly with Standard Phone
AV-TEL2-MCCS/P	Command Center Firefighter Phone Assembly with Push-to-Talk (PTT) Phone

Check if this document is up to date | Give us feedback

9564 Yellowhead Trail NW, Edmonton AB, T5G 0W4, Canada T: 1 (866) 462-7100 E: info@harding-tech.com W: www.harding-tech.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.