





# Firefighter Phone System2 Firefighter Phone Assemblies

Th e AV-TEL2-MCCS and AV-TEL2-MCCS/P are assemblies that include a firefighter phone, phone enclosure and interface module.

The difference between the AV-TEL2-MCCS and AV-TEL2-MCCS/P is that the AV-TEL2-MCCS/P includes a push-to-talk firefighter phone. Both assemblies interface the Firefighter Phone System2 command center telephone with the Advanced AV-TEL2-RISE riser module.

Both the Advanced CCM-01-ID2 (3x3 command center) and CCM-02-ID2 (3x5 command center) inner doors can support an AV-TEL2-MCCS[/P] assembly, mounted in the bottom left side double aperture.



#### **Features**

- · Compatible with Axis AX Series Command Centers
- · Class B Supervised Interface Wiring
- Up to Two (2) AV-TEL2-MCCS[/P] per Riser Module

#### Ratings


- All Circuits Power Limited
- Terminals support 12-22 AWG Wire

### **Listings and Approvals**

- Certified to UL864 10 th Edition File No. S35979
- NYCFD COA: Pending
- · CFSM approved: Pending

REV2 Page 1 of 2

## **Wiring Diagram**

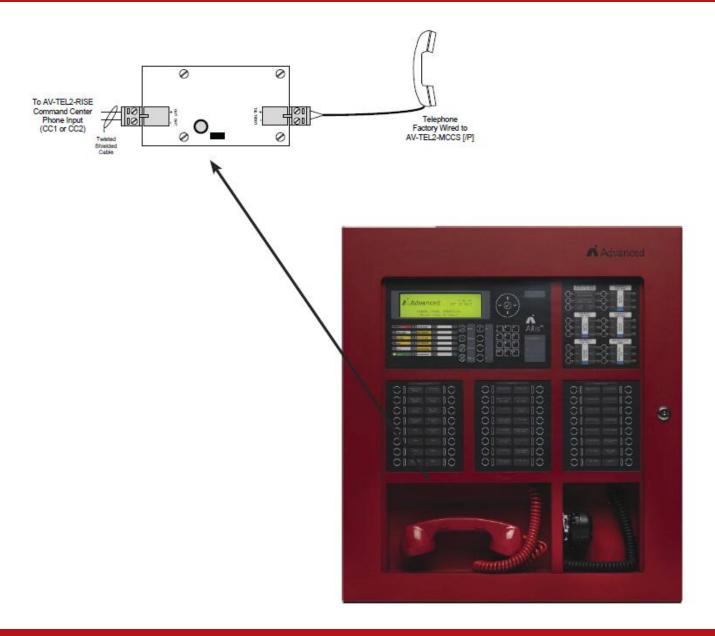

## **Order Codes and Options**

AV-TEL2-MCCS Command Center Firefighter Phone Assembly with Standard Phone

AV-TEL2-MCCS/P Command Center Firefighter Phone Assembly with Push-to-Talk (PTT) Phone

Check if this document is up to date | Give us feedback

9564 Yellowhead Trail NW, Edmonton AB, T5G 0W4, Canada T: 1 (866) 462-7100 E: info@harding-tech.com W: www.harding-tech.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.

REV2 Page 2 of 2