



# RT10 Right Track Controller/Expander

## Description

The RightTrack RT10 Controller and RT10 Expander are designed to facilitate the monitoring of discrete inputs and the control of discrete outputs, communicating with a host system via an Ethernet network. The modules are both economical and compact, and mount easily to a standard DIN rail.


The RT10 Controller provides 18 open drain outputs and 18 discrete inputs that can be software configured for either supervised or non-supervised operation. With terminating resistors installed, supervised inputs can detect both open circuit and short circuit faults, and can monitor the status of either one or two switches\* (allowing up to 36 switches to be monitored).

The RT10 controller also includes an Ethernet port and a 200 MHz ARM9 processor (that runs the Linux operating system), and provides supply circuitry for powering up to three RT10 Expanders.

RT10 Expanders are simply “daisy-chained” (one after the other) to an RT10 Controller, with each expander providing an additional 24 outputs and 24 inputs. A total of 90 discrete outputs and 90 discrete inputs (supporting up to 180 switches) can therefore be managed by an RT10 system.

## Features

- an RT10 Controller/Expander provides 18/24 supervised or non-supervised inputs
- with terminating resistors, each supervised input can monitor one or two discrete contacts
- supervised inputs detect open and short circuit faults in the field wiring
- 2000V transient protection on all inputs
- an RT10 Controller/Expander provides 18/24 current sinking outputs
- current limit protection on all outputs
- terminal blocks provide reliable termination of input and output wiring
- up to three RT10 Expanders can be connected to an RT10 controller
- modular architecture allows expander modules to be easily connected to the controller or other expander module




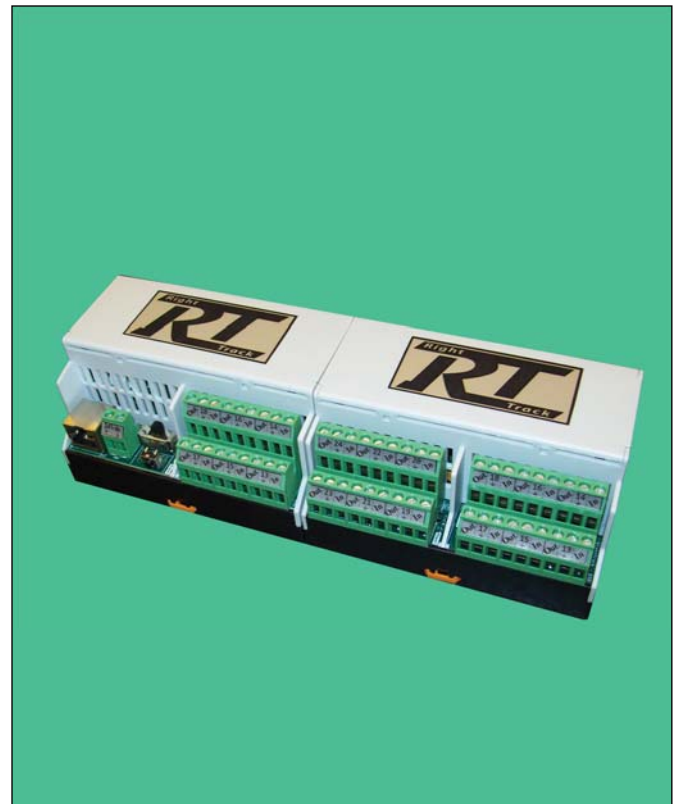


## Specifications

|                            |   |
|----------------------------|---|
| Physical                   | 2.40" H x 3.54" W x 4.25" D<br>(61 x 90 x 108 mm) |
| Environmental              |   |
| Operating Temperature      | 32 to 122 °F (0 to 50 °C)                         |
| Storage Temperature        | -40 to 158 °F (-40 to 70 °C)                      |
| Humidity                   | 0 to 95 % non-condensing                          |
| Power Supply               | 24 Vdc -10% + 10% @ 0.25A                         |
| Field Connections          |   |
| Input                      | screw terminal                                    |
| Output                     | screw terminals                                   |
| Network                    | RJ-45 Ethernet connection                         |
| Power                      | screw terminal                                    |
| I/O Capacity Controller    | 18 supervised inputs<br>18 outputs                |
| I/O Capacity Expander      | 24 supervised inputs<br>24 outputs                |
| Output - open drain output |   |
| voltage                    | 30 Vdc max  |
| current sinking            | 250 mA max  |



\* when using two switches on a supervised input both switches must be momentary switches.

# Mechanical

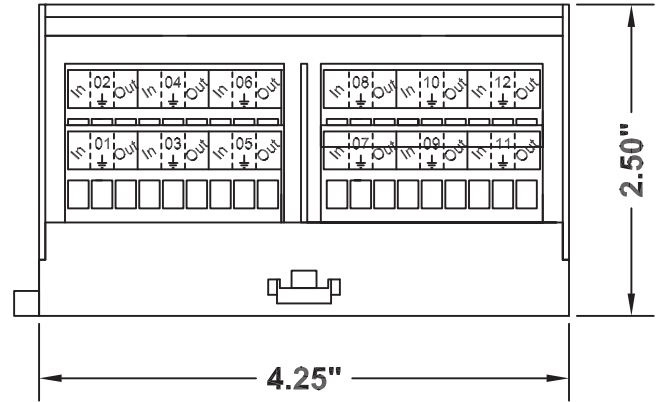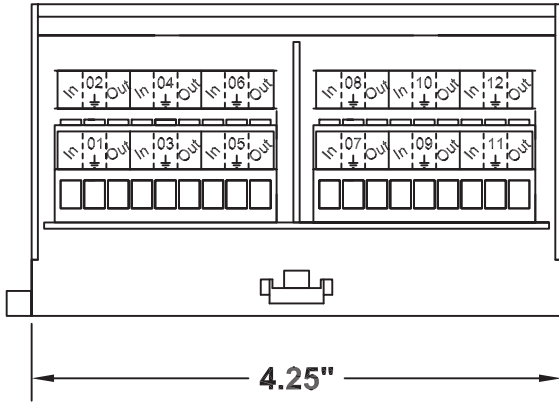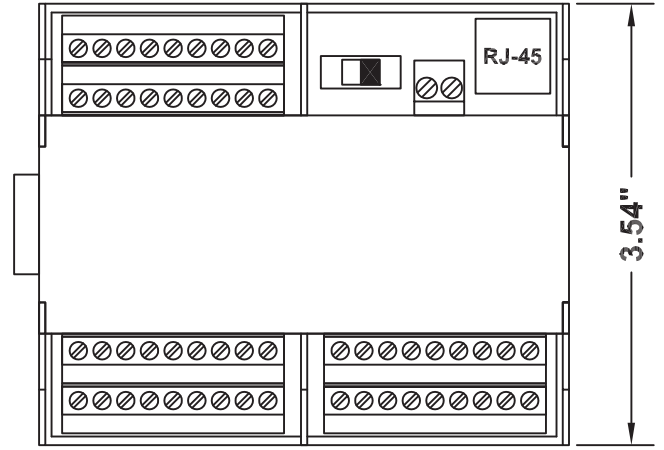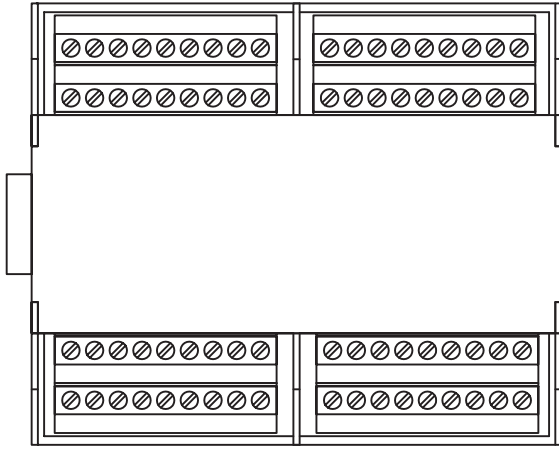

**Expander Module**

**Controller Module**

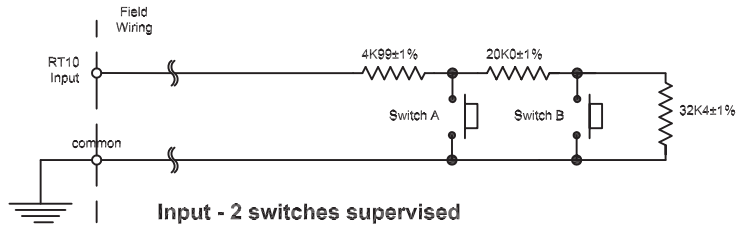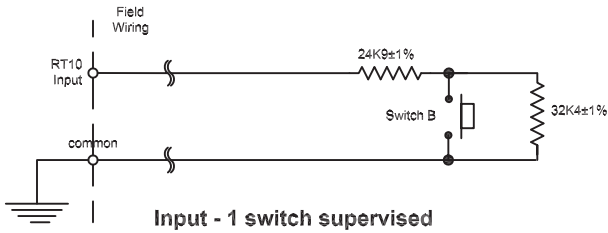

## Ordering Information

Part number RT10-AB

- A Controller or Expander unit
  - 0 Controller
  - 1 Expander
- B Termination
  - 0 Standard Switch Inputs
  - 9 Custom



9564 Yellowhead Trail NW Tel 780.462.7100  
 Edmonton, AB T5G 0W4 Fax 780.450.8396  
 sales@harding.ca www.harding.ca



Represented by: