





# **Expansion Power Supply Module**

The CAX-PSU is an Expansion Power Supply Module for use with the Advanced Axis AX Series Intelligent Fire Alarm Control Panels. The Expansion Power Supply Module provides an additional 5 amp of filtered, regulated, 24 VDC power for notification appliance circuits and auxiliary power outputs.

The CAX-PSU is a completely self-contained, temperature compensated, switching power supply designed to maximize energy and enclosure space.

Simple to install, the CAX-PSU typically mounts in an Axis AX Series enclosure. The unit mounts with screws to dedicated standoffs located on the right-hand side of the enclosure back box, below the base card. AC power is fed from the AC terminal block of the Axis AX Series CAX-ACB module to the CAX-PSU via a pluggable Molex connector. Expansion Power Supply Module availability and supervision is accomplished through wiring of the CAX-PSU to the Axis AX Series CAX-CTL base card.




#### Features

- 120 or 240 VAC Input, 50/60 Hz
- 27.4 VDC @ 5 Amp
- Temperature Compensated Output
- Switching Power Supply Technology
- Filtered & Regulated Power Output
- Emissions & Safety Shield
- ANSI / UL 864 Listed
- 5 Amp @ 24 VDC Filtered, Regulated Supply
- Easy Cabinet Mount
- Energy & Space Saving Design
- Fully Self-Contained

#### Listings and Approvals

 CAN/ULC-S527-11 & CAN/ULC-S559-04 Listed: 100780709NYM-001

## Wiring Diagram

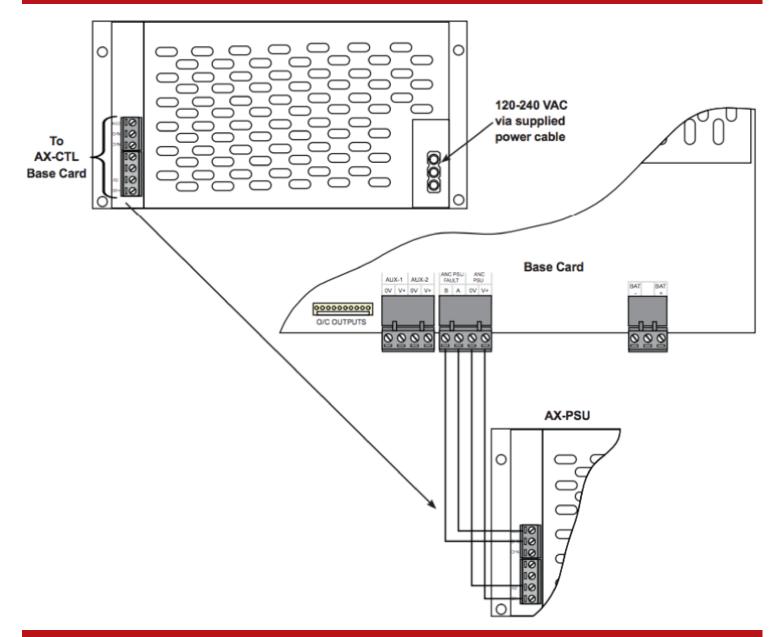

## Specification

AC Input	120 VAC - 240 VAC, 2.7 Amp (Max), 50/60 Hz
DC Output Voltage Current	27.4 VDC 5 Amp
Output Voltage	Filtered, Regulated Temperature Compensated (Tracks AX-CTL Base Card DC Supply)
Environment	Indoor, Dry
Operating Temperature	32 ° F-120 ° F (0 ° C-48 ° C)
Humidity	10-95% (Non-condensing)
Dimensions	7.19"W x 3.69"H x .2.31"D
Weight	1 lb 10 oz

## **Order Codes and Options**

CAX-PSUExpansion Power Supply Module521-175AX-PSU, AC Cable Replacement

Check if this document is up to date | Give us feedback

9564 Yellowhead Trail NW, Edmonton AB, T5G 0W4, Canada T: 1 (866) 462-7100 E: info@harding-tech.com W: www.harding-tech.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.